

**NOTES:**

Temp.Range:-40 to +70°C  
 Sensitivity:10'/2mm bubble movement  
 Centre Ring: Φ12.5mm±0.1 external diameter  
 Color : anodised , chrome plated  
 Line Thickness:0.5mm  
 Bubble:Φ10.0±0.3 at 20°C  
 Liquid:Clear  
 Backing:White  
 Case Color:Black


**SYMBOL**

**REVISION RECORD**

**DATE**

Liu

Drawn

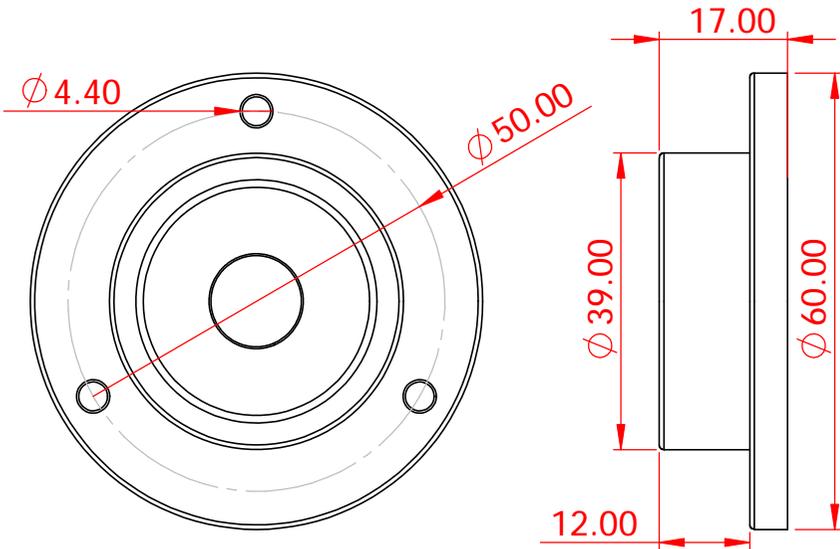

Part No	Sensitivity	Finished
SMCL60	10'/2mm	anodised
SMCL60B	10'/2mm	chrome

**L.V Level Co.,Ltd**  
[www.level-tool.com](http://www.level-tool.com)  
[sail@level-tool.com](mailto:sail@level-tool.com)

Unless Otherwise Specified:Units: mm  
 Tolerances: XX. ± 1.0 | XX.X ± 0.25 | XX.XX ± 0.1

**MATERIAL:**  
 Vial: Glass  
 Housing: Aluminium

**DRAWN BY:**

**DATE:** 2017-3-25

liu

**DRAWING NUMBER**

768#,Nanhai Road,Nantong,Jiangsu,China

**TITLE:** Surface Mounted Circular Levels  
 Diameter 60mm Sensitivity: 10' /2mm

**SCALE:** 1:1

SMCL60