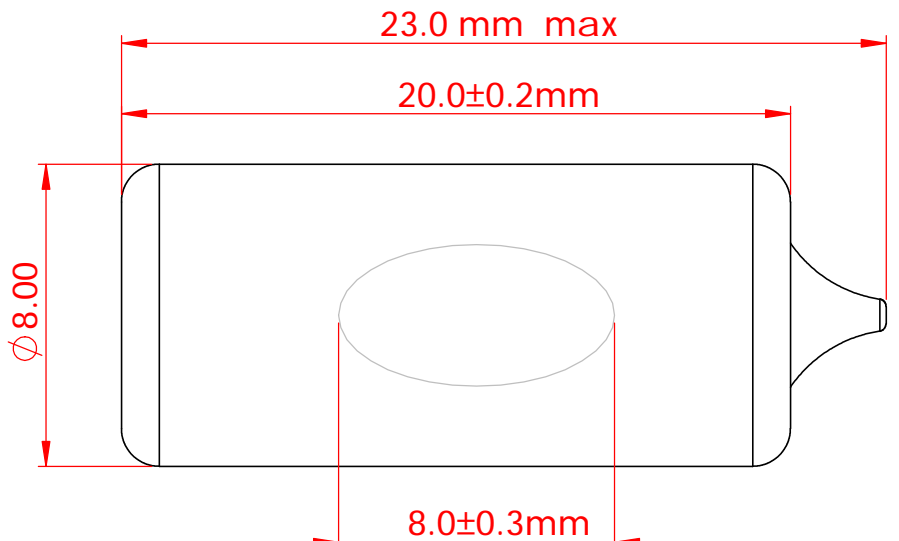



6	5	4	3	2	1	
<b>NOTES:</b>		<b>SYMBOL</b>			<b>REVISION RECORD</b>	<b>DATE</b>
Specifications: - barrel grinding, R=1375mm - Polished finish - Sensitivity 5' ± 30" per 2mm bubble movement						
Filling: - Liquid n-Heptane(min 99/9% purity) - Airbell 8.0±0.3mm at 20°C						
Finish: - Outside Glass surface to be free from scratches - No finger prints - No internal or external dust particles						
Packing: - Antistatic tape and reel, 200 pcs per reel						
Inspection: - 100% automated vision inspection for vial Length, bubble size and hysteresis.						
Performance: - Resolution < 1 arc second - Hysteresis < 10 arc seconds - Operating temperature range -20°C to 70°C - Storage temperature range -40°C to 80°C						
 <b>L.V Level Co.,Ltd</b> <a href="http://www.level-tool.com">www.level-tool.com</a> <a href="mailto:sail@level-tool.com">sail@level-tool.com</a>	Unless Otherwise Specified:Units: mm Tolerances: XX. ± 1.0   XX.X ± 0.25   XX.XX ± 0.1	<b>MATERIAL:</b> soda glass tube, 8mm Dia	<b>DRAWN BY:</b> liu	<b>DATE:</b> 2004-12-23	<b>DRAWING NUMBER</b>	
	<b>TITLE:</b> Sensor vial, 20x8mm, sensitivity 5' /2mm	<b>SCALE:</b> 1:1		6610/5		
6	5	4	3	2	1	